


JUPITER WITH PHOTOCELL

HIGH EFFICIENCY AREA FLOODLIGHTS WITH PHOTOCELL

Jupiter is a new generation of area floodlights that offers exceptional energy savings and outstanding performance, with an efficacy of 140lm/W as standard. This delivers savings of up to 40% compared with many other LED floodlights. The ultra-sleek die cast body is fitted with a multi-voltage driver, allowing Jupiter to be used for site lighting as well as 277V supply applications.

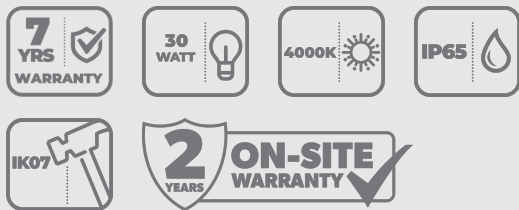

Features

- Ultra-sleek yet robust design
- High efficiency 140lm/W – saves energy
- Multi-voltage driver, suitable for 110V & 277V
- 240H Salt Spray Tested
- Pre-wired with 1m cable

Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
JUPS30PC-40	Jupiter 30W 4200 lm Symmetrical Floodlight 4000K with Photocell	4200lm		30W	140 lm/W

Product Information

Warranty	7 Years
On-Site Warranty	2 Years
Colour Appearance (CCT)	4000K
IP Rating	IP65
IK Rating	IK07
Voltage	110-277V
Material (Body/Housing)	Die-Cast Aluminium
Material (Diffuser/Cover)	Tempered Glass
Colour Rendition (CRI)	Ra >70

Colour Finish	Black RAL9017
LED Life Expectancy	L70B50 50,000 Hours
Power Factor	0.95
Frequency	50/60Hz
Driver Type	Fixed Output
Approval	UKCA CE
Electrical Class	Class I
Working Temperature	-30°C to 45°C



JUPITER WITH PHOTOCELL

HIGH EFFICIENCY AREA FLOODLIGHTS WITH PHOTOCELL

Packaging Information

Dimensions (mm)	L: 257 x W: 247 x D: 50 mm
Product Net Weight (kg)	1.3 kg
Barcode	5055807624992
Box Dimensions (mm)	L: 260 x W: 300 x D: 75 mm
Box Gross Weight (kg)	1.43 kg

Units/Outer Carton	6
Outer Carton Barcode	15055807624999
Outer Carton Dimensions (mm)	L: 480 x W: 273 x D: 320 mm
Outer Carton Gross Weight (kg)	9.55 kg

